


**Technical details**


<b>Nominal size</b>	5 mm
<b>Temperature range</b>	0°C ... +70°C
<b>Medium</b>	Filtered, oil-free and dried compressed air according to ISO 8573-1:2010, Class 7:2:4, instrument air, free of aggressive additives. Alternatively the pressure dew point must be at least 10°C below lowest occurring ambient temperature.
<b>Materials</b>	Body: aluminium-die-cast (varnished), seals: NBR, ceramic (only 84-4HV-18), inner parts: Al, steel



Manually operated valve with rotating lever.  
Available as 4/2- and 4/3-way detent valve, center ports closed.

**4/2-way-valves**


84-4HV-xx-520-S  
4/2-way, with detent function, with nut

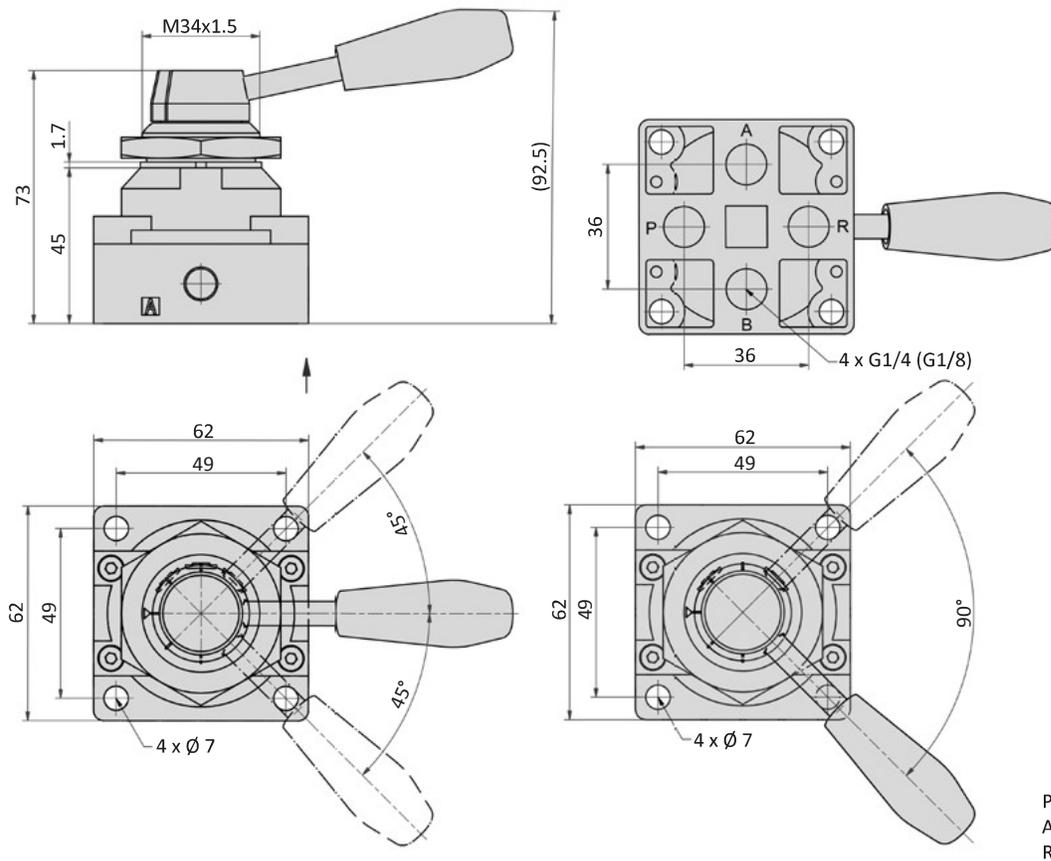
**4/3-way-valves**


84-4HV-xx-530-S  
4/3-way, center position closed, with nut

Please complete: xx = 18 for G1/8  
xx = 14 for G1/4

**Technical data**

Model-no.:	84-4HV-18-520-S	84-4HV-14-520-S	84-4HV-18-530-S	84-4HV-14-530-S
<b>Connection</b>	G1/8	G1/4	G1/8	G1/4
<b>Flow rate (NI/min)</b>	980	980	980	980
<b>Operating pressure (bar)</b>	0 ... 8 bar			
<b>Weight (kg)</b>	0.39	0.68	0.39	0.67

**Dimensions**


P = pressure inlet  
A, B = outlets  
R = exhaust