

Series 86-MV-5-28


Technical details

Connection	G1/8
Temperature range	-10°C ... +70°C
Medium	Filtered, oil-free and dried compressed air according to ISO 8573-1:2010, Class 7:2:4, instrument air, free of aggressive additives. Alternatively the pressure dew point must be at least 10°C below lowest occurring ambient temperature.
Materials	Body: Al (anodized), plastic, seals: NBR, inner parts: Al, steel and plastic
Protection	IP 65 according to EN 60529



Electrically operated spool valve. The manual override is detent/ non-detent. It is operated manually or by screwdriver.


5/2-way valves



86-MV-5-28-510-xxx
5/2-way, single solenoid, air spring return




86-MV-5-28-511-xxx
5/2-way, single solenoid, mechanical spring return




86-MV-5-28-520-xxx
5/2-way, double solenoid


5/3-way valves



86-MV-5-28-530-xxx
5/3-way, center position closed



86-MV-5-28-533-xxx
5/3-way, center position exhausted



86-MV-5-28-534-xxx
5/3-way, center position pressurized

Please complete: xxx = electrical option


Electrical options

Nominal voltage	Power consumption	Specifics	Plug connection*1	-xxx Manual override on same side of ports 2 and 4
24 V DC	3 W		Form B industrial norm	-M42
220 V AC	3.5 VA		Form B industrial norm	-M57

*1 Plug socket with integrated LED are part of delivery



Technical data

Model-no.:	86-MV-5-28-510	86-MV-5-28-511	86-MV-5-28-520	86-MV-5-28-530	86-MV-5-28-533	86-MV-5-28-534
Operating pressure (bar)	1.5...8	1.5...8	1.5...8	1.5...8	1.5...8	1.5...8
Nominal size (mm)	4.5	4.5	4.5	4	4	4
Flow rate (NI/min)	750	750	750	650	650	650
Response time (ms) at 6 bar	20	20	20	20	20	20
Weight (kg)	0.212	0.212	0.320	0.363	0.363	0.363

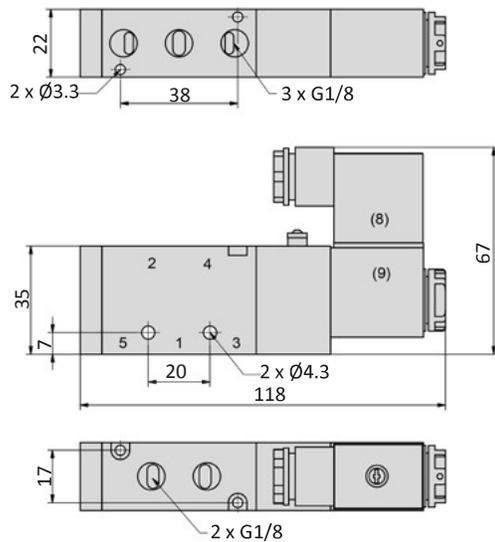Dimensions
86-MV-5-28-510, 86-MV-5-28-511


- 1 = pressure inlet
- 2,4 = outlets
- 3,5 = exhausts

Plug socket can be repositioned by 180°.
Solenoid coil can be repositioned by 4 x 90°.

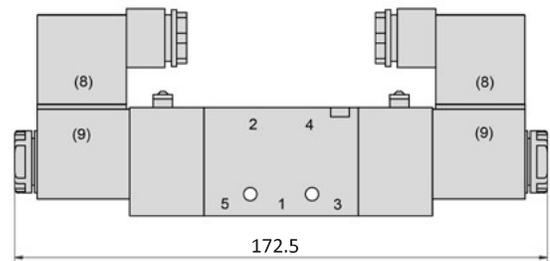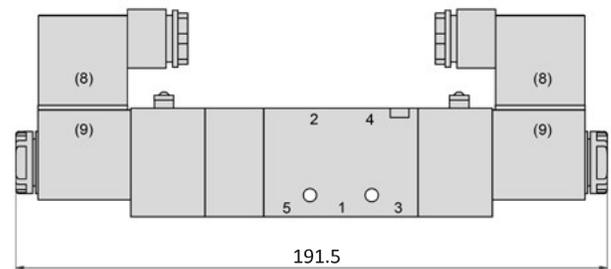86-MV-5-28-520

86-MV-5-28-53x

Accessories


Plug sockets: page 40



Manifolds: page 26