


Pressure regulator RK

Technical details

Temperature range	0°C ... +60°C
Input range	max. 16 bar
Mounting	arbitrary
Medium	compressed air according to ISO 8573-1:2010, neutral gases
Materials	Body: zinc diecasting, seals: NBR, inner parts: zinc coated steel, stainless steel and brass

Pressure regulator with diaphragm and relieving feature.
Locking: rotary lock possible.




Order code

Series		Versions	
<p style="text-align: center;">RK-***-**-0-00**</p>		<p>Digit 3 Gauge, flow direction</p>	
<p>Connection</p>		<p>0 without gauge, flow from left to right</p>	
18	G1/8	1 without gauge, flow from right to left	
14	G1/4	2 with gauge, flow from left to right (standard)	
<p>Output range</p>		3 with gauge, flow from right to left	
03	0.1 ... 3 bar	<p>Digit 4</p>	
06	0.2 ... 6 bar	1 standard	
10	0.5 ... 10 bar (standard)	2 key lockable	

Technical data

Model-no.:	RK-18-...	RK-14-...
Connection	G1/8	G1/4
Flow (NI/min)	1450	1450
Weight (kg)	0.26	0.25

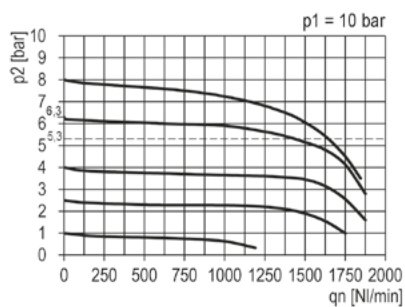Flow characteristic
RK-18, RK-14

Accessories
Mounting brackets WK

Mounting brackets WK

Coupling kits KPK

Mounting nut RM


Details: see page 12-53